


## Engineered Tapes & Laminates

# Mactac Medical Film Tapes & Transfer Films

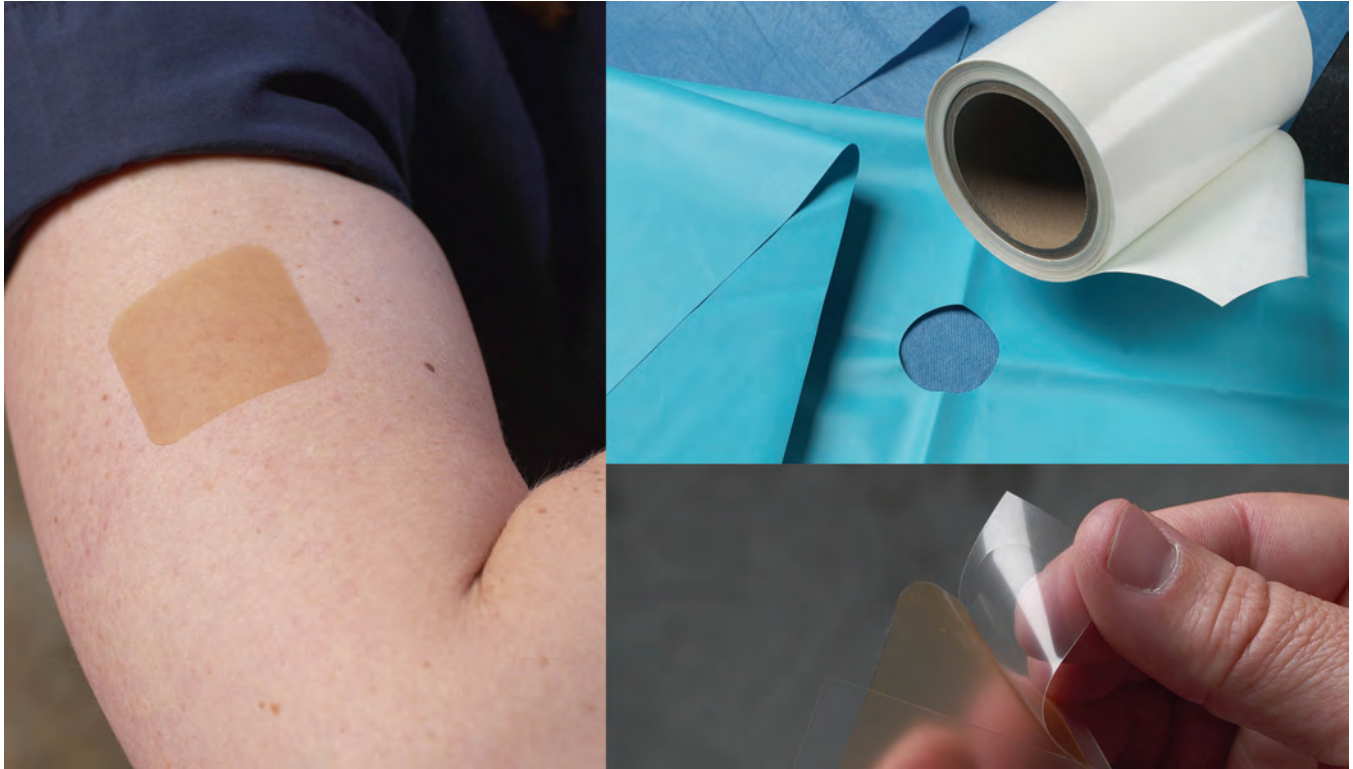

Our product offering includes single coated films, double coated films and transfer adhesives.. These products have been designed for direct skin contact, provide excellent adhesion and are cleanly removable without causing irritation. All products have been independently tested following ISO-10993 Guidelines.

### Applications:

Drape Assembly • Drape to Patient Attachment • Drape Assembly and Securement  
Device Assembly • IV Securement

### Features & Benefits:


EtO and Gamma Sterilizable • Removes Cleanly from Skin • Compatible with Most Drape Materials  
Bio-Compatibility Tested • Latex-free

# Engineered Tapes & Laminates


## Mactac Medical Film Tapes & Transfer Films




### Single Coated Film

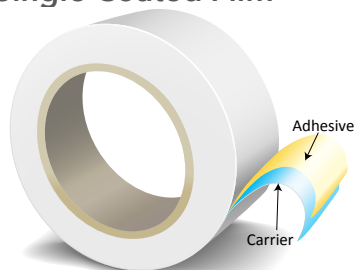

### Double Coated Film

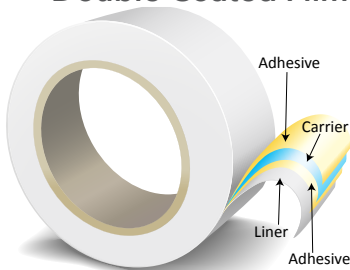

### Transfer Adhesives

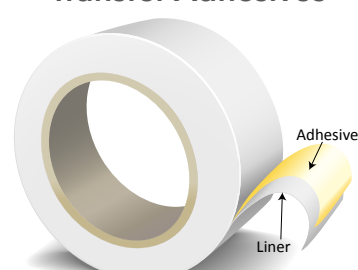

| Product                   | Carrier                        | Adhesive      | Coat Weight Mils | Liner(s)                  | Conformable | Fluid Barrier | Hypoallergenic | Latex-free | Custom | Master Roll |        | Weight / MSI | Stock/MTO |
|---------------------------|--------------------------------|---------------|------------------|---------------------------|-------------|---------------|----------------|------------|--------|-------------|--------|--------------|-----------|
|                           |                                |               |                  |                           |             |               |                |            |        | Width       | Length |              |           |
| Film Tape - Single Coated |                                |               |                  |                           |             |               |                |            |        |             |        |              |           |
| TM7100 Custom             | 2.5 mil White Gloss PE         | 899 HM Rubber | 1.0              | 40# SCK                   | ✓           | ✓             | ✓              | ✓          | ✓      | 60"         | 750'   | 0.28         | M         |
| TM7101 Custom             | 2.5 mil Taffeta Embossed PE    | 899 HM Rubber | 1.0              | 40# SCK                   | ✓           | ✓             | ✓              | ✓          | ✓      | 60"         | 750'   | 0.28         | M         |
| TM7102 Custom             | 3.0 mil Tan Matte Polyethylene | 899 HM Rubber | 1.0              | 40# SCK                   | ✓           | ✓             | ✓              | ✓          | ✓      | 60"         | 750'   | 0.28         | M         |
| Film Tape - Double Coated |                                |               |                  |                           |             |               |                |            |        |             |        |              |           |
| TM8500                    | .50 mil PET                    | 160 Acrylic   | 1.2/1.2          | 2.0 mil PET / 2.0 mil PET |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.30         | S         |
| TM8510                    | .50 mil PET                    | 150 Acrylic   | 1.8/1.8          | 72# PCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.33         | S         |
| TM8520                    | .50 mil PET                    | 150 Acrylic   | 2.4/2.4          | 72# PCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.35         | S         |
| TM8610                    | .50 mil PET                    | 160 Acrylic   | 1.2/1.2          | 72# PCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.28         | S         |
| TM8650                    | .50 mil PET                    | 160 Acrylic   | 2.4/2.4          | 72# PCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.35         | S         |
| TM8710A                   | .50 mil PET                    | 899 HM Rubber | 2.0/2.0          | 60# SCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.35         | S         |
| TM8720                    | .50 mil PET                    | 593 HM Rubber | 2.0/2.0          | 60# SCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.35         | S         |
| TM8750                    | .50 mil PET                    | 593 HM Rubber | 2.6/2.6          | 80# SCK                   |             | ✓             | ✓              | ✓          |        | 60"         | 750'   | 0.38         | S         |
| Transfer Adhesives        |                                |               |                  |                           |             |               |                |            |        |             |        |              |           |
| TM1050                    | N/A                            | 150 Acrylic   | 2.0              | 72# PCK                   | ✓           |               | ✓              | ✓          |        | 60"         | 540"   | 0.30         | S         |
| TM1054                    | N/A                            | 150 Acrylic   | 4.0              | 72# PCK                   | ✓           |               | ✓              | ✓          |        | 60"         | 540"   | 0.32         | S         |
| TM1060                    | N/A                            | 160 Acrylic   | 2.0              | 72# PCK                   | ✓           |               | ✓              | ✓          |        | 60"         | 540"   | 0.30         | S         |
| TM1064                    | N/A                            | 160 Acrylic   | 4.0              | 72# PCK                   | ✓           |               | ✓              | ✓          |        | 60"         | 540"   | 0.32         | S         |

Please request Mactac Performance Guides for detailed product information. Contact your sales representative or customer service for more information.

Shelf Life: Two years from date of manufacture, when stored at 75°F (24°C) and 50% relative humidity or less. It is recommended the product be stored in its original package, until ready for use.

